



## NEW TRIA MR16 ROUND downlight

alu brushed, max. 50W, incl. clip springs

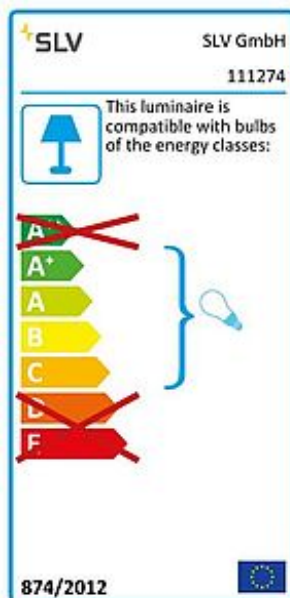

|                              |   |
|------------------------------|---|
| Article number               | 111274                                      |
| Feed-in capability           | No  |
| Type of lamp                 | Conventional lamp                           |
| LBS code                     | QR-C51                                      |
| Lamp                         | MR16 12V                                    |
| Lampholder / Socket          | GX5,3                                       |
| Number of light sources      | 1   |
| Lamp included                | No  |
| Installation diameter        | 7.8 cm                                      |
| Installation depth           | 10.5 cm                                     |
| Tilt range                   | 30 Degree                                   |
| Rotation range               | 360 Degree                                  |
| Height                       | 11 cm                                       |
| Diameter                     | 9.3 cm                                      |
| Net weight                   | 0.143 kg                                    |
| Gross weight                 | 0.175 kg                                    |
| Voltage                      | 12 Volts                                    |
| Max. wattage                 | 50 Watt                                     |
| Protection class             | III   |
| Material                     | Aluminium                                   |
| Colour                       | Aluminium brushed                           |
| Way of mounting              | Recessed ceiling mounting                   |
| Remark 1                     | Not suitable for the use of cool-beam lamps |
| Remark 2                     | Operate with suitable transformer only      |
| Energy class luminaire       | C -   |
| Suitable for lamps from EEC  | C   |
| Suitable for lamps up to EEC | A+  |
| Light distribution type 1    | direct                                      |

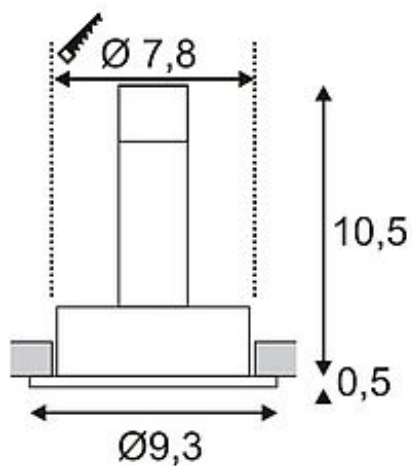

The round low-voltage version of our NEW TRIA downlight series is available in either matt white, matt black or brushed aluminum colour version. The generously chosen rotation and tilt range of the spot guarantees the individual orientation of light, whether your light source of interest is halogen or LED retrofit. To operate the NEW TRIA downlights you only need a matching transformer providing 12V alternating current. This luminaire is compatible with bulbs of the energy classes: C - A+