



NEW TRIA II MR16 downlight

rectangular, matt black, max. 2x50W, incl. clip springs

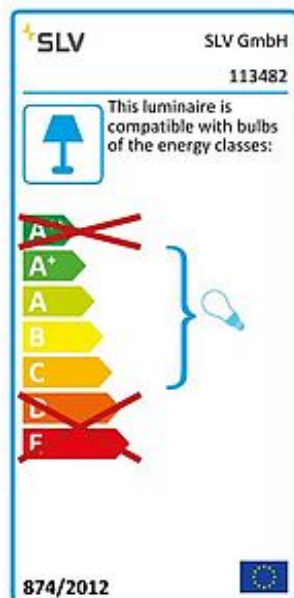

Article number	113482
Feed-in capability	No
Type of lamp	Conventional lamp
LBS code	QR-C51
Lamp	MR16 12V
Lampholder / Socket	GX5,3
Number of light sources	2
Lamp included	No
Installation length	15.5 cm
Installation width	7.8 cm
Installation depth	11.5 cm
Tilt range	30 Degree
Rotation range	360 Degree
Length	17 cm
Width	9 cm
Height	12 cm
Net weight	0.323 kg
Gross weight	0.389 kg
Voltage	12 Volts
Max. wattage	100 Watt
Protection class	III
Material	Aluminium
Colour	Black
Way of mounting	Recessed ceiling mounting
Remark 1	Not suitable for the use of cool-beam lamps
Remark 2	A suitable 12V transformer is required for operation
Energy class luminaire	C -
Suitable for lamps from EEC	C
Suitable for lamps up to EEC	A+
Light distribution type 1	direct

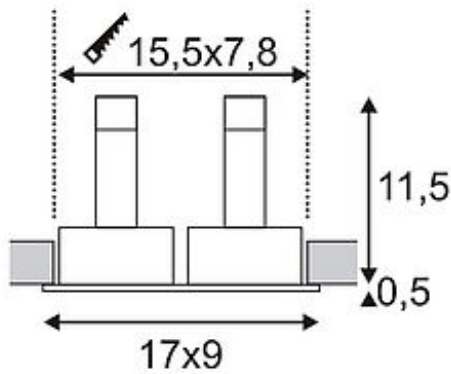

The square low-voltage version of our NEW TRIA downlight series is available in matt white, matt black and brushed aluminum colour version to be equipped with two illuminants. The generously chosen rotation and tilt range of the spot guarantees the individual orientation of light, whether your light source of interest is halogen or LED retrofit. To operate the NEW TRIA downlights you only need a matching transformer providing 12V alternating current. This luminaire is compatible with bulbs of the energy classes: C - A+