


## SUPROS

recessed fitting, LED, 4000K, round, tiltable, black, 4000lm, 60° reflector, 33.5W

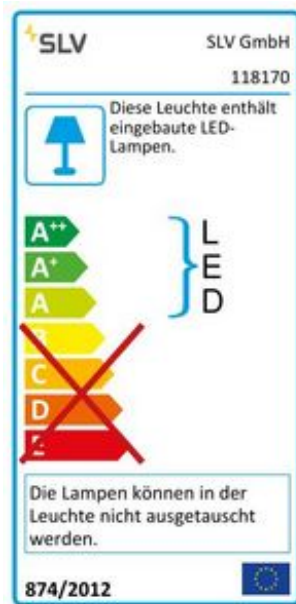

|                           |                            |
|---------------------------|----------------------------|
| Article number            | 118170                     |
| Product family            | Supros 4000                |
| Feed-in capability        | No                         |
| Lamp included             | Yes                        |
| Installation diameter     | 18 cm                      |
| Installation depth        | 11.5 cm                    |
| Height                    | 17 cm                      |
| Diameter                  | 19.5 cm                    |
| Net weight                | 1.61 kg                    |
| Gross weight              | 1.932 kg                   |
| Voltage                   | 220-240 ~50/60 . 950 Volts |
| Max. wattage              | 33.5 Watt                  |
| Protection class          | II                         |
| Beam angle                | 60 Degree                  |
| Average lifespan          | 50000 Hours                |
| Colour temperature        | 4000 Kelvin                |
| Colour rendering index    | 80                         |
| Luminous flux             | 4000 lm                    |
| Energy efficiency class   | A+                         |
| Material                  | Aluminium/glass            |
| Colour                    | black                      |
| Way of mounting           | Ceiling installation       |
| Light distribution type 1 | Direct                     |
| Light distribution type 3 | rotationally symmetric     |

The SUPROS light series impresses with its multitude of possible applications, excellent LED technology and its harmonious design. With its very high luminous flux, the Supros product family is ideally suited to replace power-hungry, conventional lighting installations. The wide-area reflector included in the delivers can be replaced by reflectors with narrower beam angles which are optionally available. This can be done without the need for tools. With the factory-installed LED driver, all the luminaires in the series are suitable for direct connection to the 230V mains supply.